

CashGuard Premium

Technical Datasheet



For retailers where speed is crucial, and the cashflow is high - CashGuard Premium is the optimal solution.



Overview

Recycling:	All denominations
Max deposit speed:	1.5 per second
Max dispense speed:	5 coins per second
	3 notes per second
Lock:	Electronic
Currencies:	SEK, NOK, EUR, ZAR, GBP, DKK, MYR, SGD

Coin Recycler S8

Colours:	Red, Black and Grey
Inlet:	Single feed of coins
Outlet:	Multi coin bowl
Denominations:	Max 8
Coin Capacity:	300-550 coins per denomination
Total capacity:	>2000 coins
Customer Display:	Integrated 2 x 16 characters

Note Recycler S4 / S5

Colours:	2-tone grey
Configuration:	Multislot with 1-3 denominations per cassette
Denominations:	Max 7
Note Capacity:	200 per cassette (800/ 100)

Certifications and Compliance

CE

EMC Directive 2014/30/EU
LVD Directive 2014/35/EU
RoHS Directive 2011/65/EU
WEEE Directive 2012/19/EU

Note Validation

ECB Decision ECB/2010/14

Reliability

MTBF: 100 000 notes/coins
Technical life time: 7 years

POS Protocol

Master 85.xx - Bi-directional API
Master 75.xx - Polled protocol

Electric/Software Specifications


Power Supply

Voltage:	230 VAC 50 Hz
Current:	2 A
Max:	216 W
Idle:	20 W

Connections

Terminal buttons:	RJ45 internal
POS:	RJ45 RS232
Store Manager:	RJ45 TCP/IP
Note Recyclers:	RJ45 Current loop
Note Collectors:	Easy Connect

Outline Dimensions

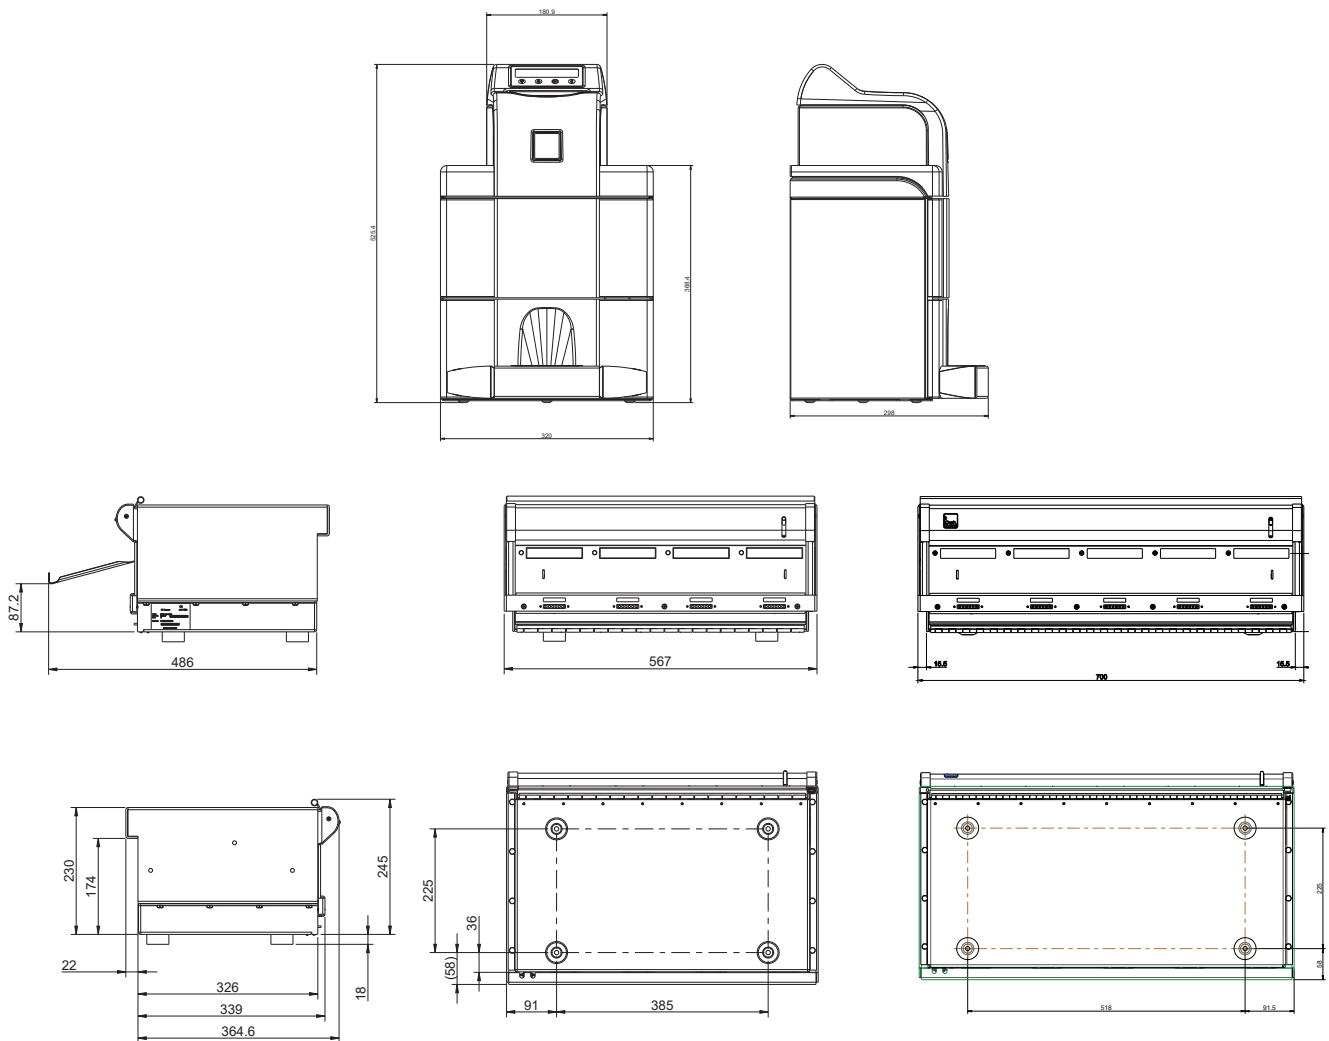

Mechanical Specifications

	Coin Recycler S8	Note recycler S4	Note recycler S5
Material:	1,5 mm steel	3 mm steel	3 mm steel
Width Top:	320 mm	567 mm	700 mm
Width Bottom:	---	536 mm	669 mm
Hight:	520 mm	230 mm	230 mm
Depth Top:	297 mm	348 mm	348 mm
Depth Bottom:	---	326 mm	326 mm
Weight:	25 kg (excl. coins)	59 kg	70 kg